


**SUPPLY STOPS**

## 1/4 TURN SUPPLY STOPS, STRAIGHT PATTERN

- Ball Valve Design
- ANSI/NSF 61.8 Approved (Low Lead)
- UPC/IAPMO Listed
- CSA Approved
- Forged Brass Body
- ISO 9001 Manufacturer
- 125 PSI
- Chrome Plated Finish

No.	Part	Materials Specification
①	Handle Screw	Steel AISI-1010
②	Handle	Zinc Alloy ASTM B86
③	Stem	Brass ASTM B-16-C36000
④	O-Ring	Rubber NBR
⑤	Compression Ring	Brass Tube ASTM B135-C26000
⑥	Compression Nut	Brass ASTM B16-C36000
⑦	Body	Forged Brass ASTM B124-C37700
⑧	Ball Disc Packing	Rubber EPDM
⑨	Ball Disc	Brass ASTM B16-C36000
⑫	Compression Ring	Brass Tube ASTM B135-C26000
⑬	Compression Nut	Brass ASTM B16-C36000
⑰	End Plug	Brass ASTM B16-C36000 - Angle Pattern

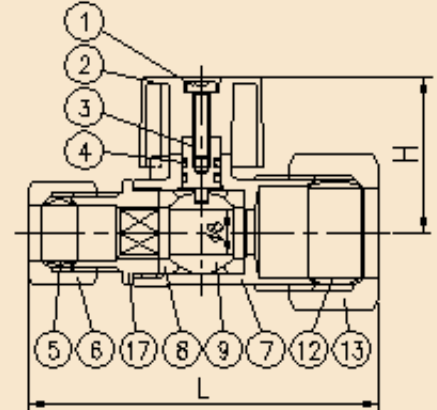

198 2000 SERIES							198 2168	198 2268
1/4 TURN STRAIGHT STOP								
Size	Fig. #	Conf.	Weight	Box/Case	L	H		
5/8" x 3/8"	198 2168HE	Comp x Comp	0.59	20/240	2.44	1.10		
3/8" x 3/8"	198 2268EE	FIP x Comp	0.44	20/240	2.00	1.10		
1/2" x 3/8"	198 2268GE	FIP x Comp	0.53	20/240	2.17	1.10		
1/2" x 3/8"	198 2368GE	SWT x Comp	0.48	20/240	2.48	1.10		
1/2" x 3/8"	198 2468GE	PEX x Comp	0.53	20/240	2.24	1.10		
1/2" x 1/2"	198 2668GG	PEX x PEX	0.46	20/240	2.24	1.10		
1/2" x 3/8"	198 2568GE	CPVC x Comp	0.62	20/240	2.76	1.10		
1/2" x 1/2" -7/16	198 2868GG	FIP X SJ	0.68	20/240	2.17	1.10		
5/8" x 1/2" -7/16	198 2868HG	Comp X SJ	0.64	20/240	2.44	1.10		
								